
# 2 Ayaklı Açık Merkez Hidrolik Ayna Standart Model
## 2 Jaws Open-Center Power Chucks Standard Type



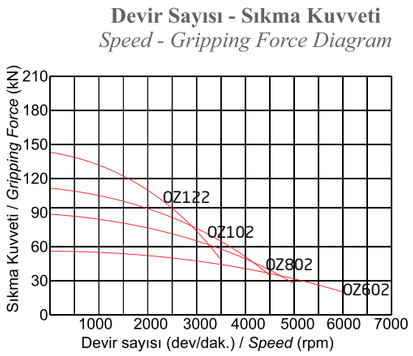


### ÖZELLİKLER

* Hidrolik aynanın tüm gövdesi özel alaşımlı çelikten üretilmiş ve Aşınmaya karşı tüm gövde dirençli hale getirilmiştir.

*Özel olarak tasarlanmış yağlama kanalları sayesinde gresörlüklerden basılan yağ,aynanın tüm sürtünmeye maruz yüzeylerine eşit miktarda dağılır ve aşınmayı minimum seviyeye indirir.

*Sertleştirilmiş ve taşlanmış çalışma yüzeyleri hassasiyet ve tekrarlabilirliği koruyarak daha uzun ömür sağlar.

### PAKET İÇERİĞİ

- Ayna ve Montaj civataları
- Yumuşak Ayak (1 Takım)
- T-Somun (1 Takım)
- T-Somun Civataları
- Ayna Anahtarı
- Yarı Mamül Fener Mili Somunu

### FEATURES

* The entire body of the power chuck is made of special alloy steel.The all body is made resistant to friction.

*Lubrication ducts are specially designed.In this way, the oil is distributed equally to all surfaces.and the abrasion on the surfaces is reduced to a minimum.

*Hardened and grinded surfaces provide longer life while maintaining accuracy and repeatability

### PACKAGE INCLUDED

- Chuck and Mounting Bolts
- Soft Jaws (1 Set)
- T-Nuts (1 Set)
- T-Nuts Bolts
- Key for Chuck İnstallations
- Unhandled Lantern spindle nut


**Teknik Özellikler** / Technical Specifications


| Sipariş Kodu<br>Order Code | Ayak Stroku<br>Jaw Stroke | Max. Devir<br>Max. Speed | Max. Çekme Kuvveti<br>Max. Drawbar Pull | Max. Sıkma Kuvveti<br>Max. Gripping Force | Piston Stroku<br>Shifter Stroke | Bağlantı Flanş No<br>Flange No | Ağırlık (kg)<br>Weight |
|---|---|---|---|---|---|---|---|
| ÖZ602 | 5.5 | 6000 | 15 KN | 38 KN | 13 | A5 | 10 |
| ÖZ802 | 7.3 | 5000 | 23 KN | 57 KN | 17 | A6 | 26,8 |
| ÖZ102 | 8.5 | 4200 | 25 KN | 74 KN | 20 | A8 | 30 |
| ÖZ122 | 8.5 | 3300 | 37 KN | 96 KN | 20 | A8 | 46 |



2 Ayaklı Açık Merkez Hidrolik Ayna Standart Model
2 Jaws Open-Center Power Chucks Standard Type



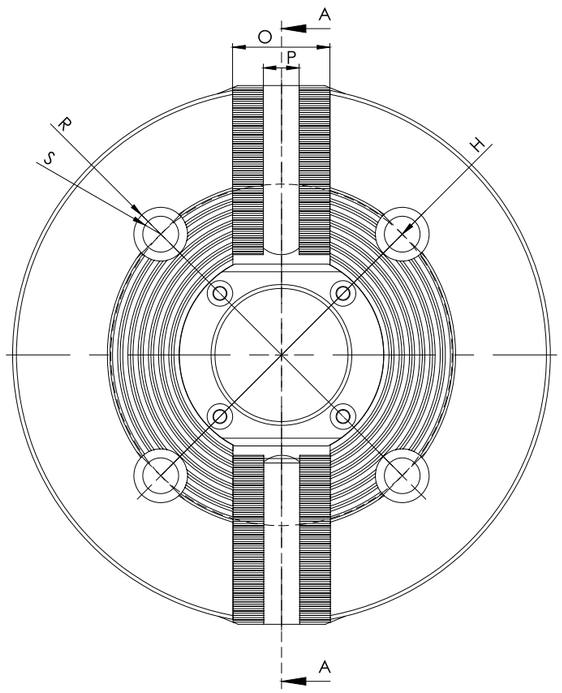

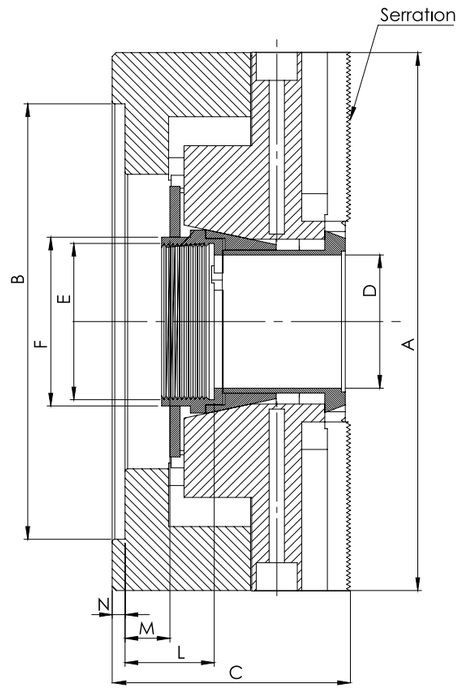
**Teknik Ölçüler** / Technical Dimensions

| Ölçüler/Size | 6" | 8" | 10" | 12" |
|---|---|---|---|---|
| Diş Htv/Serration | 1.5x60° | 1.5x60° | 1.5x60° | 1.5x60° |
| A | 169 | 210 | 254 | 305 |
| B (H6) | 140 | 170 | 220 | 280 |
| C | 83 | 93 | 102 | 112 |
| D | 45 | 52 | 75 | 91 |
| E | M55X2 | M60X2 | M85X2 | M100X2 |
| F | 60 | 66 | 94 | 108 |
| H | 104,8 | 133,4 | 171,4 | 171,4 / 234 |
| L | 30 | 33 | 30 | 36 |
| M | 12 | 17,5 | 20 | 20 |
| N | 5 | 5 | 5 | 6 |
| O | 32 | 38 | 41 | 51 |
| P (h8) | 12 | 14 | 16 | 21 |
| R | 17 | 20 | 26 | 26 |
| S | 12 | 14 | 18 | 18 |



CHS / Series