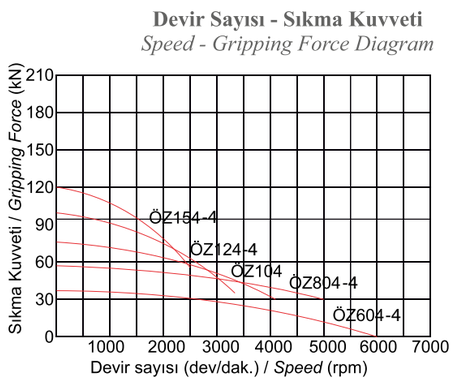



## ÖZELLİKLER

* Hidrolik aynanın tüm gövdesi özel alaşımlı çelikten üretilmiş ve Aşınmaya karşı tüm gövde dirençli hale getirilmiştir.

*Özel olarak tasarlanmış yağlama kanalları sayesinde gresörlüklerden basılan yağ,aynanın tüm sürtünmeye maruz yüzeylerine eşit miktarda dağılır ve aşınmayı minimum seviyeye indirir.

*Sertleştirilmiş ve taşlanmış çalışma yüzeyleri hassasiyet ve tekrarlabilirliği koruyarak daha uzun ömür sağlar.

## FEATURES

* The entire body of the power chuck is made of special alloy steel.The all body is made resistant to friction.

*Lubrication ducts are specially designed.In this way, the oil is distributed equally to all surfaces.and the abrasion on the surfaces is reduced to a minimum.

*Hardened and grinded surfaces provide longer life while maintaining accuracy and repeatability

### PAKET İÇERİĞİ

- Ayna ve Montaj civataları
- Yumuşak Ayak (1 Takım)
- Sert Ayak (1 Takım)
- T-Somun (1 Takım)
- T-Somun Civataları
- Ayna Anahtarı
- Yarı Mamül Fener Mili Somunu

### PACKAGE INCLUDED

- Chuck and Mounting Bolts
- Soft Jaws (1 Set)
- Hard Jaws (1 Set)
- T-Nuts (1 Set)
- T-Nuts Bolts
- Key for Chuck İnstallations
- Unhandled Lantern spindle nut

**Teknik Özellikler** / Technical Specifications


| Sipariş Kodu Order Code | Ayak Stroku Jaw Stroke | Max. Devir Max. Speed | Max. Çekme Kuvveti Max. Drawbar Pull | Max. Sıkma Kuvveti Max. Gripping Force | Piston Stroku Shifter Stroke | Bağlantı Flanş No Flange No | Sert Ayak ile Sıkma Çapı Min.-Max. Gripping Dia With Max. Speed Hard Jaws Min.-Max. | | Ağırlık (kg) Weight |
|---|---|---|---|---|---|---|---|---|---|
| ÖZ604-4 | 5.5 | 6000 | 15 KN | 38 KN | 13 | A5 | 12 | 169 | 17,5 |
| ÖZ804-4 | 7.3 | 5000 | 23 KN | 57 KN | 17 | A6 | 12 | 210 | 32 |
| ÖZ104-4 | 8.5 | 4200 | 28 KN | 74 KN | 20 | A8 | 28 | 254 | 49 |
| ÖZ124-4 | 8.5 | 3300 | 37 KN | 96 KN | 20 | A8 | 32 | 305 | 90 |
| ÖZ154-4 | 10.6 | 2500 | 43 KN | 120 KN | 23 | A8 - A11 | 45 | 381 | 140 |




4 Ayaklı Açık Merkez Hidrolik Ayna Sert Ayaklı Model
4 Jaws Open-Center Power Chucks Hard Jaw Type



CHS / Series

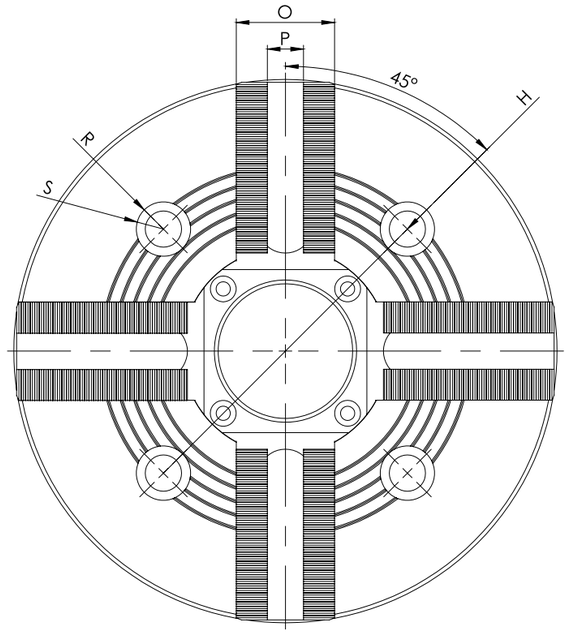

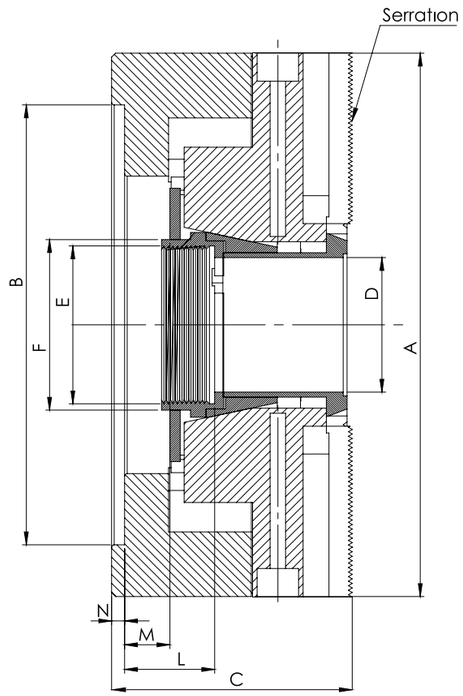
**Teknik Ölçüler** / Technical Dimensions

| Ölçüler/Size | 6" | 8" | 10" | 12" | 15" |
|---|---|---|---|---|---|
| Diş Htv/Serration | 1.5x60° | 1.5x60° | 1.5x60° | 1.5x60° | 1.5x60° |
| A | 169 | 210 | 254 | 305 | 381 |
| B (H6) | 140 | 170 | 220 | 280 | 300 |
| C | 83 | 93 | 102 | 112 | 138 |
| D | 45 | 52 | 75 | 91 | 120 |
| E | M55X2 | M60X2 | M85X2 | M100X2 | M130X2 |
| F | 60 | 66 | 94 | 108 | 140 |
| H | 104,8 | 133,4 | 171,4 | 234/171,4 | 235 |
| L | 30 | 33 | 30 | 36 | 47,5 |
| M | 12 | 17,5 | 20 | 20 | 23 |
| N | 5 | 5 | 5 | 6 | 6 |
| O | 32 | 38 | 41 | 51 | 62 |
| P (h8) | 12 | 14 | 16 | 21 | 24 |
| R | 17 | 20 | 26 | 26 | 32 |
| S | 12 | 14 | 18 | 18 | 22 |