Hassas CNC İnce Çaplı Döner Punta
Precision CNC Slim Size Live Center



ÖZELLİKLER

* İnce çaplı olarak tasarlanmış döner puntalarımız, küçük gövde yapısı nedeniyle dar çalışma alanlarında kullanım kolaylığı sağlamaktadır.

* Sertleştirilmiş ve hassas şekilde taşlanmış döner punta merkezi, 0.005 Salgı toleransına ve sahiptir.

* Uzun olarak tasarlanmış döner punta merkezi sayesinde, eksenel ve radyal yüklenmeleri tüm punta gövdesine eşit miktarda dağıtır ve döner punta rulman ömrümü uzatır.

* Döner puntanın uzun yıllar hassasiyetini koruyabilmesi için, puntanın arka kısmını yapılmış yağ tapası sayesinde kolay bir şekilde döner punta rulmanlarını yağlamanıza olanak tanır.

* Döner punta gövdesi ve merkezi, aşınmaya dayanıklı ısıl işlem çeliğinden üretilmiş ve sertleştirilmiştir.

* Üçlü olarak tasarlanmış rulman sistemi sayesinde rijit ve daha temiz bir tornalama yüzeyi elde etmenize imkan tanır.

* Hassas ve kaliteli rulmanları sayesinde,eksenel ve radyal yüklerin yanı sıra yüksek hızlarada dayanıklıdır.

* Döner punta ön kapak kısmına montaj edilmiş keçe rulmanların dışarıdan toz,pislik ve sıvı temasına karşı koruma sağlamaktadır.

FEATURES

* Our thinner diameter live center provides ease of use in narrow working areas due to its small body structure.

* The center of the live center is hardened and precisely ground.LİVe center have 0.005 backlash.

* The lively center end is designed to be long.it deal ut the axial and radial loads evenly throughout the live center body. Extends bearing and live center life.

* Thanks to the lubrication cover on the back of the rotating tailstock, the tailstock can maintain its precision for many years.

* The body of the live center and the center are made of wear-resistant heat treatment steel and hardened.

* Thanks to the triple designed bearing system, it provides a rigid and cleaner turning surface.


* Thanks to its precision and quality bearings, it is resistant to axial and radial loads as well as high speeds.

* The bearings are protected against liquid and environmental contamination by means of a seal mounted on the front cover of the live center.


Hassas CNC İnce Çaplı Döner Punta
Precision CNC Slim Size Live Center




MODEL 820

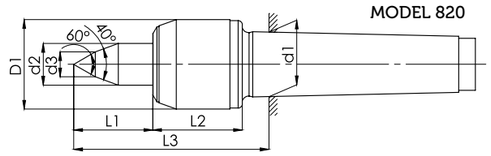


MODEL 830

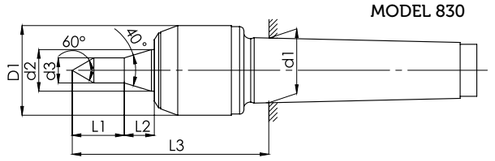


MODEL 840

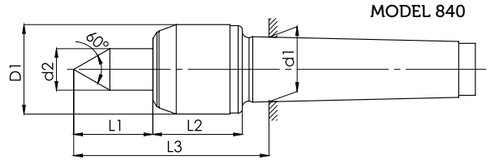

MODEL		820		830		840	
Mors Koniği / Morse conic	MK	4	5	4	5	4	5
Ölçüler mm Dimensions mm	D1	43	60	43	60	43	60
	d1	31.267	44.399	31.267	44.399	31.267	44.399
	d2	20	30	20	30	20	30
	d3	12	14	12	14	-	-
	L1	30	50	25	25	27	40
	L2	88	62	15	27	42	60
	L3	88	123	95	133	88	118
Uç Salgısı / Center Runout	Max	0.005	0,005	0.005	0,005	0.005	0,005
Ağırlık / Weight	kg.	1,2	3	1,2	3	1,2	3
Sipariş Kodu / Order Code		C110	C140	C120	C150	C130	C160

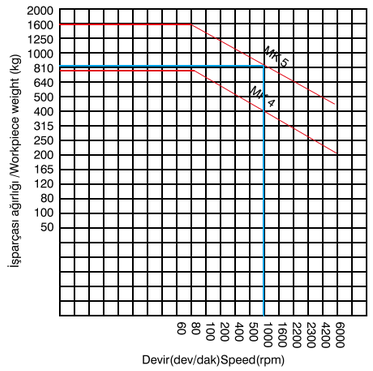

Örnek: 1000 Dev/Dak. ile dönen MK5 puntanın taşıya bileceği yük değeri
Radyal yük: 820 kg
eksenel yük: 480 daN

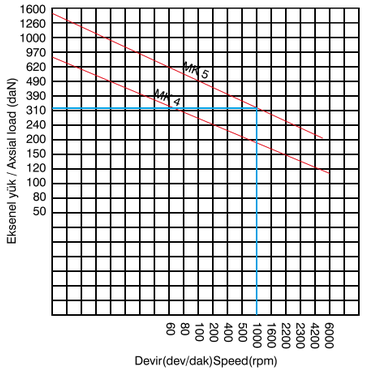

Example: load value that rotary MK5 center cold carry with 1000 revolution /min
Radial road: 820 Kg
Axal load: 480 daN